

Measuring and testing instrument

TT-1'000

Comparison measurement unit for temperature control units

Simple and reliable checking of temperature, pressure and flow rate

Operating principle

The measuring and testing instrument TT-1'000 has been designed for a reliable examination of temperature control units. It allows to check the temperature controller and all kind of temperature probe without removing these components out of the temperature control unit. The measuring instrument works within the temperature range of -20°C up to $+360^{\circ}\text{C}$.

The controller - adjusted with a calibrator - guarantees a precision of $\pm 0.5^{\circ}\text{C}$.



The pressure measurement is made thanks to a precision manometer which shows values in the pressure range as well as in the vacuum range. The integrated flow control displays the effective flow rate by several pressures and temperatures. With this information, the function and state of the pump can be easily checked.

To record the measurements, an additional precision sensing device Pt-100 or a 0-10 V output of the controller for an actual value indication are available. To protocol the temperature measurements, it is possible to connect a writer device to one of these two outputs.

It is possible to check all temperature control units which have connections from $\frac{3}{8}$ " up to $\frac{3}{4}$ ". Water, pressurised water, heat transfer oil or synthetic heat transfer liquid can be used as circulating medium with the measuring instrument.

Domain of use:

The main domain of use of the measuring instrument is the precision check in the sense of a function check (ISO - 9000). In addition, the measuring and testing instrument is a reliable help to check whether a repair on a temperature control unit has been done correctly.

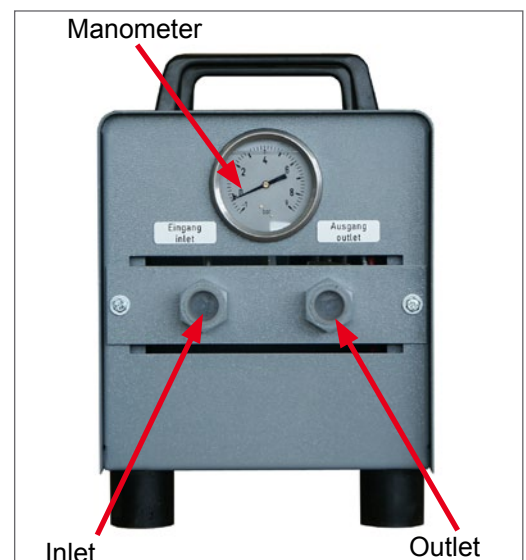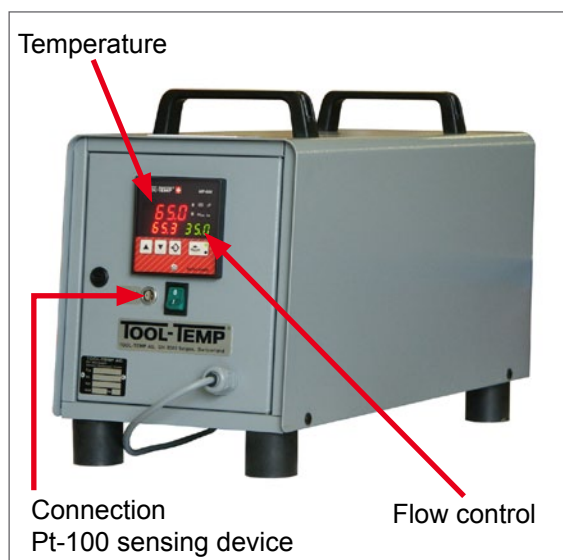

HEADQUARTERS & MANUFACTURER

TOOL-TEMP AG
Industriestrasse 30

CH-8583 Sulgen
Schweiz - Suisse - Switzerland

Tel.: +41 (0)71 644 77 77
Fax: +41 (0)71 644 77 00

E-Mail: info@tool-temp.ch
Internet: www.tool-temp.ch




TOOL-TEMP[®]

Technical data


Operational use	for temperature control units with $\frac{3}{8}$ ", $\frac{1}{2}$ " and $\frac{3}{4}$ "-connections	
Connections	$\frac{3}{4}$ " BSP female thread (inside diameter 19 mm)	
Temperature range	-20°C up to +360°C	
Pressure indication	-1 bar up to +9 bar	
Flow range	5 up to 80 l/min if required: 1,5 up to 35 l/min also possible	
Medium	water, pressurised water, heat transfer oil or synthetic heat transfer liquid	
Precision		
<i>Temperature</i>	+/- 0,5°C, respectively according to provided test report	
<i>Pressure</i>	accuracy class 1	
<i>Flow control</i>	4 - 10 l/min	+/- 1,5 l/min
	10 - 30 l/min	+/- 1,0 l/min
	30 - 70 l/min	+/- 1,5 l/min
Output	separate Pt-100 for the connection of a temperature recorder or 0-10 V as output of the temperature indication	
Electrical connection	230 V, 50/60 Hz - standard 110 - 120 V, 50/60 Hz - on requirement	
Dimensions (L×W×H)	580 × 255 × 370 mm	
Weight	approx. 22 kg	
Colour	silvergrey RAL 7001	

Front view

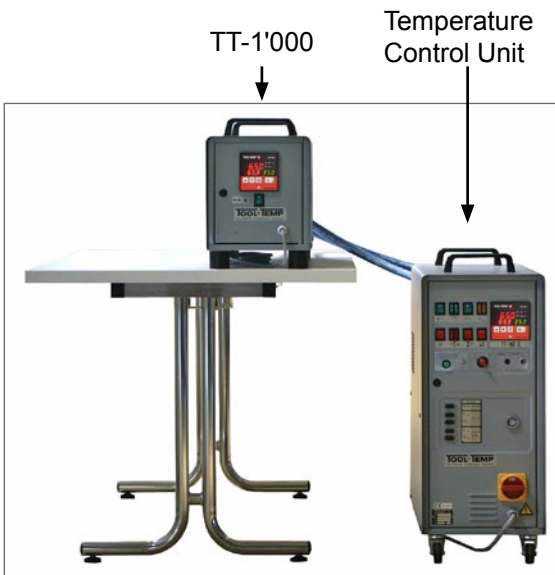

Example, how to test a temperature control unit.

Rear view

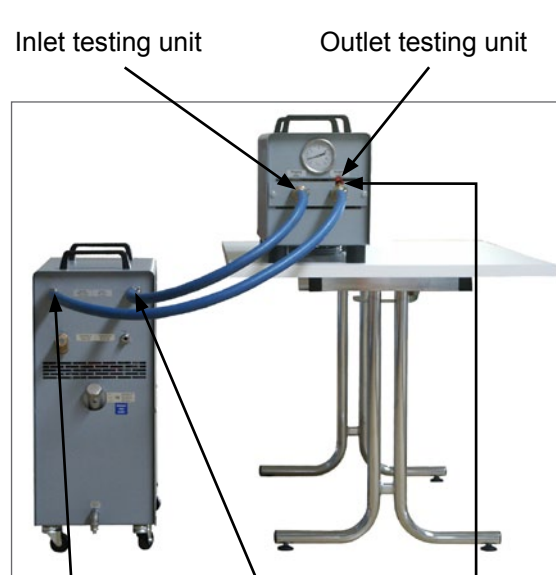

From mould temperature control unit

To mould temperature control unit

For pressure measuring, mount a stop valve at the outlet of the testing unit

Connecting hoses and stop valves are excluded from scope delivery.

