

# Heating and Cooling Unit

# TT-510 X

For temperatures from 80°C up to 300°C  
Heating capacity 96 kW



Operational use:

rollers, plates, double walled vessels and other heavy duty use



## Features included

- Self-optimizing temperature controller with digital display of the set and actual temperature. With high precision regulation in  $1/10^\circ$  range; can be adjusted to read °C or °F.
- Automatic temperature control - difference between set and actual temperature activates an alarm.
- Digital flow indication with control of the minimum flow.
- Indication of the pump pressure.
- Lime scale free heat exchanger.
- Leak free high temperature pump with axial face seal.
- Hot oil circuit with by-pass, which ensures internal circulation if valves are closed.
- Large expansion tank with a drip pan.
- No oil cracking because of special construction of the heating elements.
- Heating with automatic cascade connection.
- Safety devices:
  - Level control for dry run protection.
  - Electronic temperature limiter in the controller and separate mechanical safety thermostat.
  - Main switch, transformer and motor protection switch.
  - Horn in case of failure.
- All failures are visually indicated.

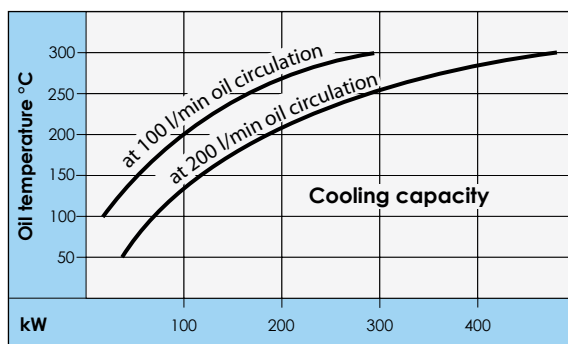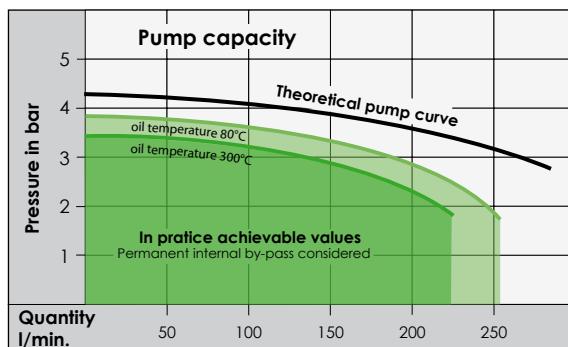

## Operating principle

Closed hot oil circuit with overlaying cold oil receiver in a large expansion tank. Long life expectancy of the oil with no cracking, due to low watt density heating elements and a high flow rate. A drip pan under the expansion tank prevents the unit from getting dirty if it is filled incorrectly. This model is designed for highest temperatures and optimum safety.

## HEADQUARTERS & MANUFACTURER

**TOOL-TEMP AG**  
Industriestrasse 30

**CH-8583 Sulgen**  
Schweiz - Suisse - Switzerland

Tel.: +41 (0)71 644 77 77  
Fax: +41 (0)71 644 77 00

E-Mail: [info@tool-temp.ch](mailto:info@tool-temp.ch)  
Internet: [www.tool-temp.ch](http://www.tool-temp.ch)



# TOOL-TEMP®

## Technical data

<b>Temperature range</b>	up to 300°C with heat transfer oil TOOL-THERM SH-3
<b>Temperature control</b>	self-optimizing, electronic microprocessor controller MP-888 with digital display of the set and actual value. Automatic temperature monitoring.
<b>Flow control</b>	electronically, with digital display and automatic control of the minimum flow.
<b>Heating capacity</b> <i>Switchable in stages</i>	<b>96 kW</b> 16/16/16/16/16/16 automatic shut down of the heating capacity which is not required.
<b>Cooling capacity</b>	max. 480 kW - see diagram
<b>Cooling water consumption</b>	110 l/min (minimum 40 l/min, but leads to strong reduction of cooling capacity)
<b>Pump capacity</b> <i>Pressure mode</i>	motor 4 kW max. 4 bar / max. 260 l/min
<b>Expansion tank capacity</b>	130 litres
<b>Filling amount</b>	125 litres
<b>Expansion volume</b>	100 litres
<b>Connections</b> <i>Oil circuit</i>	Flange connection DN 32 flange-outside Ø 140 mm, with 4 holes Ø 18 mm on a screw hole circle of 100 mm recommended sealing: 80 x 42 x 2 mm
<i>Cooling water circuit</i>	1½" BSP female thread (required water pressure 1.5 - 4 bar)
<b>Dimensions (L×W×H)</b>	2'150 × 1'300 × 1'950 mm
<b>Weight</b>	approx. 845 kg empty
<b>Colour</b>	silvergrey RAL 7001

All possible voltages are available from 3 x 200 V to 3 x 600 V and 50/60 Hz. The units are available conform to UL/CSA specifications. For the USA market the units are equipped with NPT-thread connections and the controller is adjusted to indicate °F.

## Electronic temperature controllers

The electronic controllers MP-888 and MP-988 can be operated to read °C or °F. The analog interfaces 0-5 V, 0-10 V and 4-20 mA are standard included in the controllers - **without additional costs**.

The self-optimizing feature on these controllers allows a very high regulating accuracy even at high temperatures and adheres to the set temperatures independently of the consumer size.

### Flow control:

The indication of the flow rate is possible in litres or gallons per minute. As soon as the flow falls below a minimum, the alarm is activated.

### Standard controller MP-888



#### Analog interfaces

- 0 - 5 V, 0 - 10 V, 4 - 20 mA

### Digital interface controller MP-988 (Optional)



#### Analog interfaces

- 0 - 5 V, 0 - 10 V, 4 - 20 mA

#### Digital interface

- RS-485, RS-232, Current Loop 20 mA, CAN-bus, Profibus
- Incl. all existing machine protocols

#### Temperature difference monitoring

Indication of up to three temperatures



**TOOL-TEMP**